

# ANST 04M 08M

PLUS+  
(+4 IP)

PLUS+  
(+8 IP)

NDA  
Compliant product

4CH / 8CH : PLUS+ (+4 IP), (+8 IP)  
DIGITAL VIDEO RECORDER




## FEATURES

- Full GUI with alpha blending
- PLUS+ : 4 Coax + 4 IP, 8 Coax + 8 IP
- Individual setting of resolution, frame rates and picture quality
- Instant Replay, Digital Zoom, Mouse Control
- Weekly scheduler with holiday by 10 minutes setting
- Covert, Disable and Private function of cameras
- Motion Detection with 576 area setting
- PTZ control by RS-485
- Daylight Saving Time and Network Time Setting
- Multi User Authority upto 8 users, 22 languages with full graphic
- Deinterlacer upon live and playback
- Relay alarm output, Individual Network port setting
- Auto Deletion
- Interactive setup via network
- POS Interface
- Dual CODEC Engine for independent video transmission



## DIMENSIONS (mm)

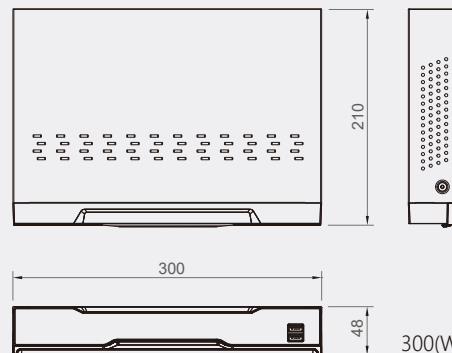

300(W)×210(D)×48(H)

## SPECIFICATIONS

		ANST 04M	ANST 08M	
VIDEO	Camera input	4 Coax + 4 IP (PLUS+)	8 Coax + 8 IP (PLUS+)	
	Individual HD/Analog selec.	Analog, AHD, TVI, CVI, IP		
	Available source	TVI/AHD/CVI 720p25,30/ 1080p25,30/ 3MP@18~30/ 4MP@12~30/ 5MP@20/ 8MP@15 Composite/ 960H/ Mixed		
	IP Camera	Number	4	8
		Resolution	upto 5M	
		Spec.	ONVIF 1812, RTSP, H.264, H.265, Dual stream use gigabit ethernet hub	
Restriction		Cannot setup Private ZONE, Cannot support Timestamp		
Output	1 HDMI (Main Display, ~4M@30), 1 VGA (Main Display, ~1080p60), 1 Composite(Programmable SPOT)			
Audio input / output	4 RCA / 1 RCA	8 RCA / 1 RCA		
Sensor in / Alarm out	4 (NC, NO selectable) / 1 Relay	8 (NC, NO selectable) / 1 Relay		
Operating System	Embedded Linux OS			
DISPLAY	Speed	Real Time		
	Resolution(pixel)	1280X720, 1920X1080, 4M		
	Split screen	1, 4 (PLUS+)	1, 4, 6, 8, 9 (PLUS+)	
Main Recording	CODEC	H.264, H.265		
	Resolution (pixel)	8MP: 8MP, 1080p / 5MP: 5MP, 720p / 4MP: 4MP, 720p / 3MP: 3MP, 720p 1080p: 1080p, 720p / 720p: 720p, 960x540 / 960H, Composite: 960H, D1		
	Picture quality	4 steps (Super, High, Medium, Low)		
	Speed	60fps@4MP	120fps@4MP	
Dual Recording	CODEC	H.264, H.265		
	Resolution (pixel)	512 x 320		
PLAYBACK	Display	1, 4 (PLUS+)	1, 4, 6, 8, 9 (PLUS+)	
	Search mode	Calendar, Event, POS, Thumbnail, Bookmark		
	Fast/Slow speed	Normal, REW & FF (recorded speed x2, x4, x8, x16, x32, x64, x1/2, x1/4), Frame to frame, Pause		
	Speed	60fps@4MP	120fps	
NETWORK (Individual setting of resolution, frame rate & picture quality)	Network Interface	Megabit Ethernet	Gigabit Ethernet	
	Protocol	TCP/IP, HTTP, DHCP		
	Application/Mobile App.	Windows 7, 8, 10 (PC client system & IE), Mac / Android, iPhone for live & search		
	Web browser	Internet Explorer, Safari, Chrome, Firefox		
Backup interface / device	USB2.0 x 2 / External HDD, CD&DVD-RW, Network, Thumb Drive			
The number of HDD	1 SATA (No capacity limit ; 8TB or more)			
Power Consumption	24W			
Operating Temp. / Relative Humidity	5~40°C (41~104°F) / Max. 80% non-condensing			